

18孔防水连接器

低压，信号传输，0.5方导线，防水

产品型号:

→ 插头:

- MPS05-BSFA0180 (CODE A)
- MPS05-BSFB0180 (CODE B)
- MPS05-BSFC0180 (CODE C)
- MPS05-BSFD0180 (CODE D)

→ 插座:

- MPS05-BSMA0180 (CODE A)
- MPS05-BSMB0180 (CODE B)
- MPS05-BSMC0180 (CODE C)
- MPS05-BSMD0180 (CODE D)

→ U形卡:

- MPS05-BSU15180
(用于1.5mm料厚的安装面板)

对配设计:

- CPA确认锁定结构

端子规格:

- 1.6x0.6mm，镀锡

端子连接工艺:

- 端子压接线塞处理

常规特性:

- IP67,IP6K9K (配合状态)
- 互配次数: 最少50次

性能参数:

- 工作温度: -40°C ~ +125°C
- 额定电压: 60V DC
- 额定电流: 2A Max
- 线材线径: 0.5 mm²
(ϕ 1.4mm~ ϕ 1.6mm)

产品材料:

- 塑胶壳体材料: PBT-GF
- 端子材料: 铜合金


工作界面:

- Code A/B/C/D




外形尺寸:

插头: MPS05-BSFX0180

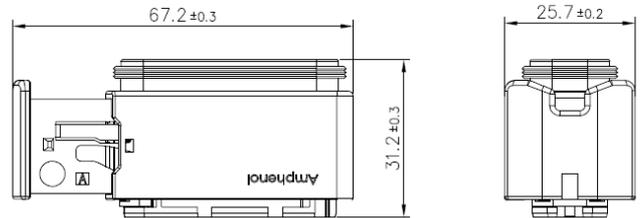

插座: MPS05-BSMX0180

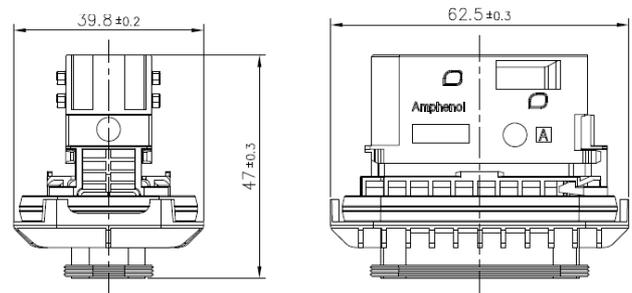

U形卡: MPS05-BSU15180

